


## Reformed Rubber Elevator Belt

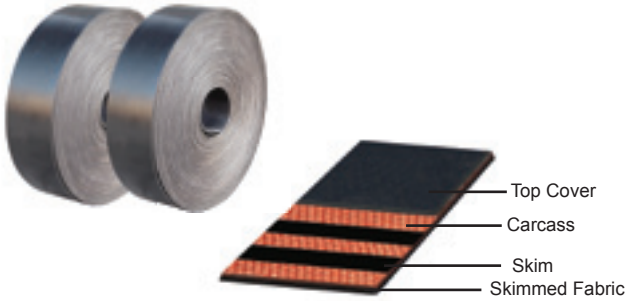

### FEATURES

- Additional wear resistant fabric is added onto the bottom rubber which is the driven side of the belt to increase belt life.
- Well suited to grain handling industry.

### TECHNICAL SPECIFICATIONS

Model	Color	Thickness (mm)	Rated Tensile Strength in Warp (N/mm)	Elongation at Rated Load (%)	Adhesion Strength (N/mm)		Working Temperature (°C)	Recommended Minimum Pulley Diameter (mm)
					Carcass Ply to Carcass Ply	Cover Rubber to Carcass Ply		
600YP	Black	5.0	600	≤ 1.2	≥ 4.5	≥ 3.2	-35~+85	300
800YP		6.5	800					350
1000YP		8.0	1000					400

Note: Punching services is available on request.

### PERFORMANCE OF COVER RUBBER

Index	Units	Value
Tensile Strength	MPa	≥12
Elongation at Break	%	≥450
Abrasion Loss	mm <sup>3</sup>	≤150

